

Cladding Hook End Fixing

GRIPPLE®

The suspension of HVAC, Mechanical, Lighting & Electrical services in an indoor stationary setting.
NOT suitable for use in chlorinated / swimming pool environments.

APPLICATION / MATERIAL SPECS

Metal decking roof structures. Fits into a 1/4" hole.

MATERIAL

Cable: Galvanized high tensile steel cable to EN12385.

Standard lengths from 5ft-30ft, other lengths can be made to order.

	No. 1	No. 2
Cable Dia. (in.)	1/16"	5/64"
Strand configuration	7x7	7x7


Cladding Hook: Zinc plated steel

CLADDING HOOK

Cable with Cladding Hook end fixing*




SIZE SPECS

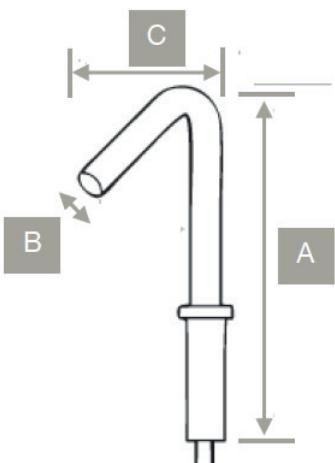

Size	A (in.)	B (in.) \varnothing	C (in.)
No. 1	2 3/8"	1/4"	15/16"
No. 2	2 3/8"	1/4"	15/16"

INSTALLATION

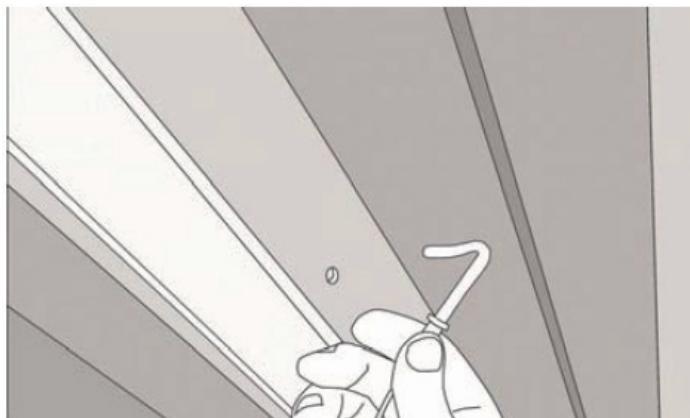

Metal Decking Roof Structures

Fits into a pre-drilled 1/4" hole