


Premium UL 181A-P/181B-FX Listed Foil Tape

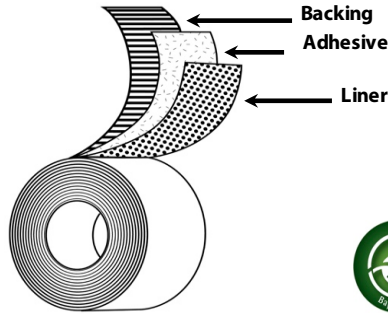

- Backing:** Printed 2.1 mil Foil
- Adhesive:** Cold weather Acrylic
- Liner:** Unbleached Natural Kraft Paper
- Colors:** Aluminum
- Specifications:** UL 181A-P and 181B-FX Listed
- Standard Sizes:** 2.5" x 60Yd, 72mm x 55m

Applications

- Permanently seals seams in fiberglass duct board and flexible ducts for HVAC systems
- Durable seal for dryer ventilation
- Suitable for sealing metal to metal seams on rigid sheet metal ducts

Features

- Aggressive Cold Weather Acrylic Adhesive
- UL 181A-P & B-FX Listed
- Low VOC Content

Benefits

- Superior performance in all climate conditions
- Resists mold and mildew growth
- Meets code requirements and can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED®
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/o Liner	4.8 mils	0.122 mm	ASTM D-1000
Foil Thickness	2.1 mils	0.053 mm	ASTM D-1000
Adhesion to Steel	68 oz/in	7.44 N/cm	PSTC-101
Adhesion to Backing	60 oz/in	6.56 N/cm	PSTC-101
Tensile Strength	28 lb/in	49.04 N/cm	ASTM D-1000
Application Temperature	-10 to 200 °F	-23 to 93 °F	
Operating Temperature	-25 to 325 °F	-32 to 163 °C	
Flame Spread	3		
Smoke Developed	0		
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



Albany Steel & Brass Corporation

SUCCESSORS TO LEOVITZ BROTHERS
 DISTRIBUTORS OF FASTENERS, INDUSTRIAL & MILL SUPPLIES
 SINCE 1918

1900 W. GRAND AVE. CHICAGO, IL 60622
 Phone: 312-733-1900 Fax: 312-733-9887
 sales@albanysteel.com www.albanysteel.com

