


Berry 555 FlexFix Contractor-Tough OPP Film Tape features a tough, hand-tearable film backing and high performance acrylic adhesive that bonds exceptionally well to reflective and bubble insulation materials.

FlexFix is UL 181B-FX Listed and ideal for:

- Joining and sealing connections in class 1 flexible duct systems (181B-FX) for air conditioning, heating, and ventilation systems
- Sealing and patching reflective and bubble insulation
- Dryer vent and bath fan duct sealing

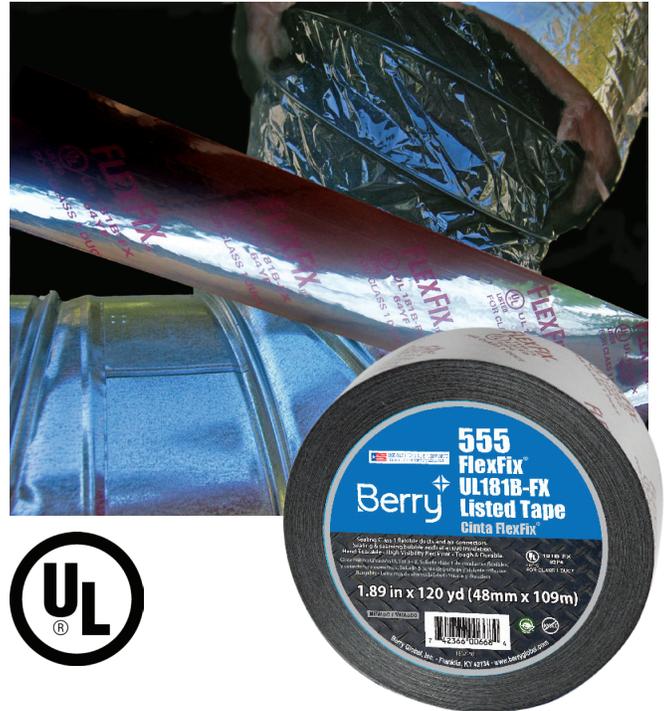

### Feature

OPP Film Backing

Acrylic Adhesive

UL 181B-FX Listed

Low VOC

### Benefit

Contractor tough and durable  
Hand tearable for ease of use  
High visibility print for easy inspection

Aggressive, high tack  
Mold and moisture resistant  
Operating temperature range -40 °F to 212 °F  
Low odor and low VOC content

Meets code requirements for flexible duct installations  
Can contribute to LEED® IEQ points

Available in Metallic (Red Print), or Black (White Print)  
Standard sizes: 48mm x 110M and 72mm x 110M  
**Contact your sales representative today for samples!**